

型式	T1	T2	T3	A±0.5(mm)	B±0.5(mm)	C±0.5(mm)
KT-15	1/2"	1/2"	1/2"	28.5	46.0	60.0
KT-20	3/4"	3/4"	3/4"	34.0	53.5	67.5
KT-25	1"	1"	1"	41.5	63.5	80.0
KT-32	1.1/4"	1.1/4"	1.1/4"	51.5	76.0	93.5
KT-40	1.1/2"	1.1/2"	1.1/2"	58.5	81.0	103.0
KT-50	2"	2"	2"	72.5	95.5	119.5
KT-65	2.1/2"	2.1/2"	2.1/2"	90.5	115.5	141.0
KT-80	3"	3"	3"	107.5	133.5	160.5

□ T1 (BSPTメスネジ) × T2 (BSPTメスネジ) × T3 (BSPTメスネジ)


■材質

本体 : ポリアミド(ガラス繊維強化ナイロン6)

■耐圧

: 1/2"~2" 20°C 1.6MPa

: 2.1/2"~3" 20°C 1.0MPa

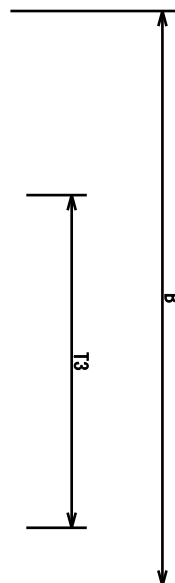

名称	樹脂製チーズ
型式	KT-XX
株式会社イリテック・プラス	