


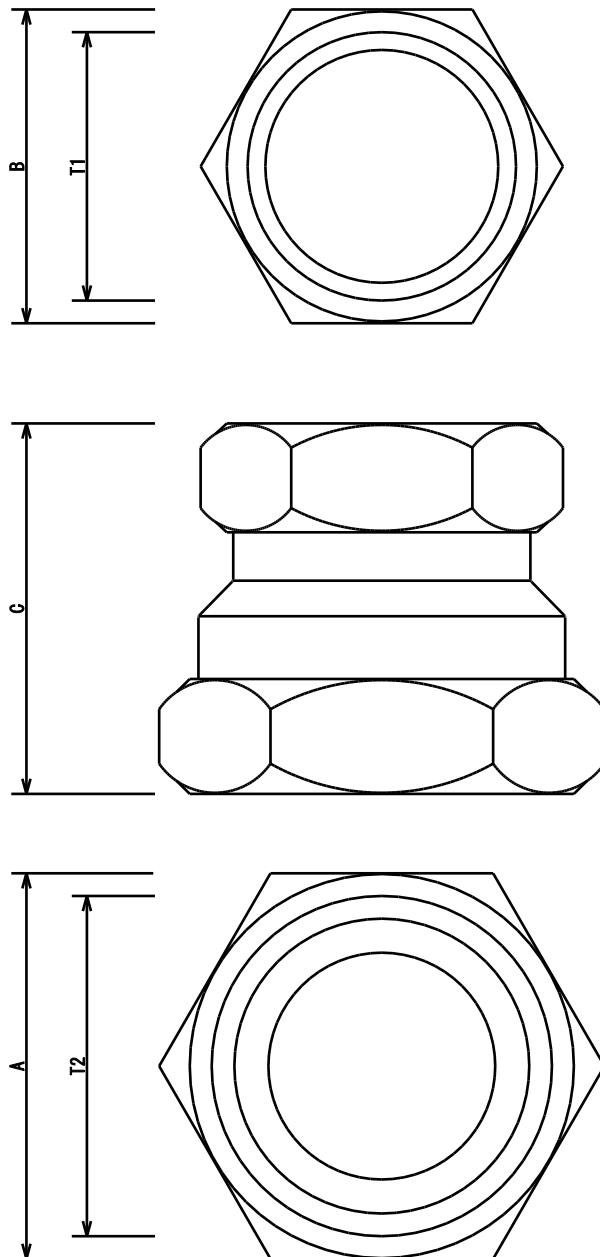

型式	T1	T2	A±0.5 (mm)	B±0.5 (mm)	C±0.5 (mm)
KS-1520	1/2"	3/4"	34.0	28.0	42.5
KS-1525	1/2"	1"	41.5	28.0	47.5
KS-2025	3/4"	1"	41.5	34.0	45.5
KS-2032	3/4"	1.1/4"	51.5	34.0	52.0
KS-2040	3/4"	1.1/2"	58.5	34.0	52.0
KS-2050	3/4"	2"	71.5	34.5	60.5
KS-2532	1"	1.1/4"	51.0	41.5	49.0
KS-2540	1"	1.1/2"	58.0	41.0	51.5
KS-2550	1"	2"	71.5	41.0	59.5
KS-3240	1.1/4"	1.1/2"	58.0	51.0	53.0
KS-3250	1.1/4"	2"	71.5	51.0	61.5
KS-4050	1.1/2"	2"	71.5	58.0	58.0
KS-4065	1.1/2"	2.1/2"	92.5	59.0	70.0
KS-5065	2"	2.1/2"	92.5	72.5	69.0
KS-5080	2"	3"	110.0	72.5	78.5
KS-6580	2.1/2"	3"	110.0	92.5	73.0

□T1 (BSPTメスネジ) × T2 (BSPTメスネジ)

■材質

本体 : ポリアミド(ガラス繊維強化ナイロン6)

■耐圧

: 1/2"~2" 20℃ 1.6MPa

: 2.1/2" 20℃ 1.2MPa

: 3" 20℃ 1.0MPa

名称	樹脂製異径ソケット
型式	KS-XXXX
株式会社イリテック・プラス	