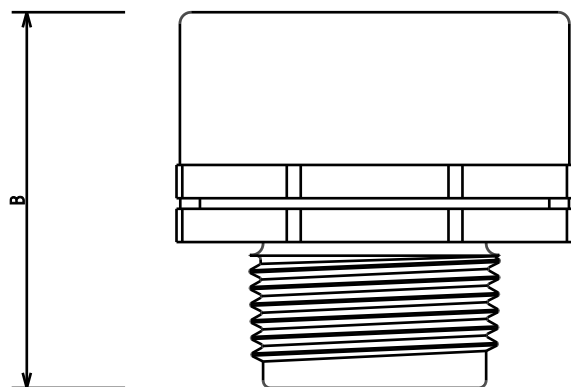

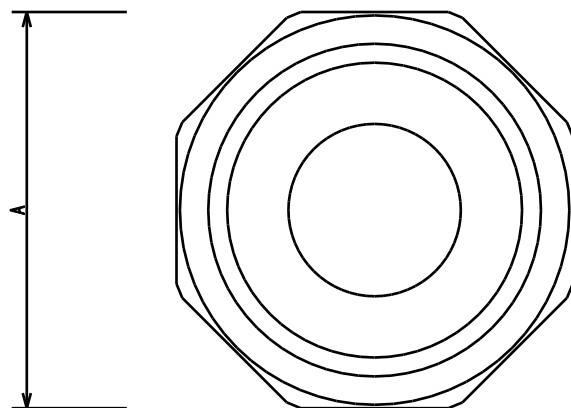


型式	T1	T2	A±0.5 (mm)	B±0.5 (mm)
TAB-2015	3/4"	1/2"	40.0	38.3
TAB-2515	1"	1/2"	50.0	39.5
TAB-2520	1"	3/4"	50.0	41.4
TAB-3215	1.1/4"	1/2"	52.4	45.5
TAB-3220	1.1/4"	3/4"	52.4	47.2
TAB-3225	1.1/4"	1"	52.4	49.7
TAB-4020	1.1/2"	3/4"	61.5	46.2
TAB-4025	1.1/2"	1"	61.5	48.7
TAB-4032	1.1/2"	1.1/4"	61.5	50.4
TAB-5020	2"	3/4"	76.0	45.9
TAB-5025	2"	1"	76.0	47.9
TAB-5040	2"	1.1/2"	76.4	50.7

□T1 (BSPTメスネジ) × T2 (BSPTオスネジ)

■材質

本体 : PP (ポリプロピレン)

■耐圧

: 20℃ 1.0MPa

名称	樹脂製逆ブッシング
型式	TAB-XXXX
株式会社イリテック・プラス	